

HDL-MPPI / TILE.48 Tile Series Power Interface 方悦面板底座

Notes: The power interface works with Tile series panels, both plastic and metal versions and both horizontal and vertical installations.

方悦面板底座，与方悦系列面板（塑料和金属版本，横向和纵向安装版本）配合使用。

buspro

Datasheet 产品说明书

Issued: April 8, 2019
发布：2019年4月8日
Edition V1.0.0



Figure 1. Tile Series Power Interface
图 1. 方悦面板底座




Figure 2. Dimensions - Front View
图 2. 尺寸图 - 正面

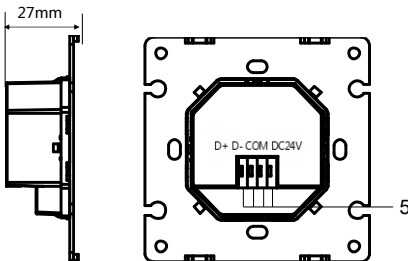


Figure 3. Dimensions - Side View
图 3. 尺寸图 - 侧面

Figure 4. Components - Back View
图 4. 部件 - 背面图

EN

Overview

Tile Series Power Interface (See Figure 1) works in conjunction with Buspro Tile Series panels and provides working voltage and communication signals to the panel.

Functions

- Provides working voltage to panel.
- Provides communication signals to panel.

Important Notes

- The panel power interface should be installed on the wall box.
- The power interface should work in conjunction with panel.
- It is recommended to connect wires in hand-in-hand.
- It is recommended to use dedicated HDL Buspro cable.

Product Information

Dimensions - See Figure 2 - 3

- 1. Communication interface:** Provides working voltage and signals.
- 2. Screw hole:** Used to secure the power interface into the wall box.
- 3. Mounting slot**
- 4. Metal plate**
- 5. HDL Buspro bus connector**

Components - See Figure 4

Installation - See Figure 5

- Step 1. Install the wall box in the wall.
- Step 2. Secure the power interface onto the wall box with screws.
- Step 3. Install the panel on the power interface.
- Step 4. Install the frame around the panel.

Safety Precautions

- The installation and commissioning of the device must be carried out by HDL or the organization designated by HDL. For planning and construction of electric installations, the relevant guidelines, regulations and standards of the respective country are to be considered.
- The device should be installed in wall box. HDL does not take responsibility for all the consequences caused by installation and wire connection that are not in accordance with this document.
- Please do not privately disassemble the device or change components, otherwise it may cause mechanical failure, electric shock, fire or body injury.
- Please resort to our customer service department or designated agencies for maintenance service. The warranty is not applicable for the product fault caused by private disassembly.

Package Contents

HDL-MPPI / TILE.48*1 / Buspro connector*1 / Screw(M4*28mm)*2 / Screw(M4*50mm)*2 / Datasheet*1

ZH

产品概述

方悦面板底座（见图1）与Buspro方悦面板配合使用，为Buspro方悦面板提供工作电压和通讯信号。

功能说明

- 为面板提供工作电压
- 为面板提供通讯信号

注意事项

- 面板底座必须暗盒安装
- 必须与面板配合使用
- 总线连接 - 推荐手拉手的连接方式
- 总线 - HDL Buspro 专用电缆

产品信息

产品尺寸 - 见图 2-3

- 1. 通信接口：**提供工作电压和通讯信号。
- 2. 螺丝孔：**用于固定电源接口模块在底盒里
- 3. 卡扣**
- 4. 金属板**
- 5. HDL Buspro接口**

部件 - 见图 4

安装 - 见图 5

- 步骤1. 将暗盒安装在墙上。
- 步骤2. 用螺丝将面板电源底座固定在暗盒里。
- 步骤3. 将面板安装在电源底座上。
- 步骤4. 装上边框。

安全警告

- 本设备的安装及调试工作必须由我司或我司指派的机构进行。其电气安装的计划和施工，必须遵守当地相关的安全标准和法规。
- 该产品需安装在暗盒内，未按照本说明书进行安装及接线方式的，所造成的一切后果皆与我司无关。
- 请不要私自拆装或更换零部件，否则可能会导致机械故障、电击、火灾或身体伤害。
- 请将一切维修工作交由我司售后部门或指定机构进行，本产品的保修范围不适用于因用户拆卸产品而导致的故障。

装箱清单

HDL-MPPI / TILE.48*1 / 总线接线端子*1 / 螺丝(M4*28mm)*2 / 螺丝(M4*50mm)*2 / 说明书*1

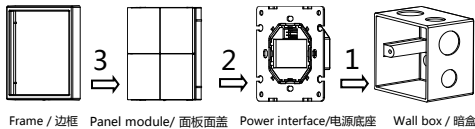


Figure 5. Installation
图 5. 安装图

EN

Technical Data

Basic Parameters						
Working voltage	12~30V DC					
Communication	HDL Buspro					
External Environment						
Working temperature	-5℃~45℃					
Working relative humidity	≤90%					
Storage temperature	-20℃~60℃					
Storage relative humidity	≤93%					
Specifications						
Dimensions	81.4×81.4×27 (mm)					
Net weight	69g					
Housing material	Steel, ABS					
Installation	Wall box (See Figure 5)					
Protection rating (Compliant with EN 60529)	IP20					
Name and Content of Hazardous Substances in Products						
Components	Hazardous substances					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Chromium VI (Cr (VI))	Poly-brominated biphenyls (PBB)	Poly-brominated diphenyl ethers (PBDE)
Plastic	o	o	o	o	o	o
Hardware	o	o	o	o	-	-
Screw	o	o	o	x	-	-
Solder	x	o	o	o	-	-
PCB	x	o	o	o	o	o
IC	o	o	o	o	x	x
The symbol "-" indicates that the hazardous substance is not contained. The symbol "o" indicates that the content of the hazardous substances in all the homogeneous materials of the component is below the limit requirement specified in the Standard IEC62321-2015. The symbol "x" indicates that the content of the hazardous substance in at least one of the homogeneous materials of the part exceeds the limit requirement specified in the Standard IEC62321-2015.						
HDL Buspro Cable Guide						
HDL Buspro	HDL Buspro Cable					
DATA+	Yellow					
DATA-	White					
COM	Black					
24V DC	Red					

ZH

技术参数

基本参数						
工作电压		12~30V DC				
通信协议		HDL Buspro				
外部环境						
工作温度		-5℃~45℃				
工作相对湿度		≤90%				
储存温度		-20℃~60℃				
储存相对湿度		≤93%				
产品规格						
尺寸		81.4×81.4×27 (mm)				
净重		69g				
外壳材料		铁, ABS				
安装方式		暗盒安装 (见图5)				
防护级别 (符合 EN 60529)		IP20				
产品中有害物质的名称及含量						
部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr (VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
塑胶组件	o	o	o	o	o	o
五金铜件	o	o	o	o	-	-
螺丝组件	o	o	o	x	-	-
焊锡	x	o	o	o	-	-
PCB组件	x	o	o	o	o	o
IC	o	o	o	o	x	x
- : 表示不含有该有害物质。 o : 表示该有害物质在该部件所有均质材料中的含量均在IEC62321-2015规定的限量要求以下。 x : 表示该有害物质至少在该部件的某一均质材料中的含量超出IEC62321-2015规定的限量要求。						
总线定义						
HDL Buspro		HDL Buspro 电缆				
DATA+		黄				
DATA-		白				
COM		黑				
24V DC		红				

技术支持
服务热线：020-85820195
(工作时间：9:00-12:00, 13:00-18:00, 星期一至星期五)
邮箱：kfb@hdlchina.com.cn
网址：http://www.hdlchina.com

Technical support
E-mail: support@hdlautomation.com
Website: https://www.hdlautomation.com

©Copyright by HDL Automation Co., Ltd. All rights reserved.
Specifications subject to change without notice.